





Composition KIT R30/1205

Code	Description		QTY
R30/1203	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 1200 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.		1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.		1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.		2
R90/F2ES	Pair of external photocells synchronized.		1
R92/LED230	LED flashing light series R92 230V AC.		1
R91/AN1/LR1	Antenna for flashing light R92 series		1
R99/C/001	Signboard "Automatic Opening"		1
Product technical specifications KIT R30/1205			
Number items per pallet 28		28	
Power		230V AC 50Hz	
Power rating		420W	
Max thrust		800N	
Frequency of use 50%		50%	
Motor thermal protection 150°C		150°C	
Operating temperature -20+55°C			
Manoeuvre speed 9.5 m/min			
Max gate weight 1200Kg			
Maximum dimension product in mm L325x W162x H295			
Encoder		Optical	
Limit switch		Mechanical	
Onboard control unit H70/104AC		H70/104AC	
· · · · · · · · · · · · · · · · · · ·		Fixing plate with stay bolts and screws and Kit mechanic limit switch (MC	• ,.
Reductor Type Irreversible			

ELECTROMECHANICAL MOTOR FOR SLIDING GATES UP TO 800/1200 Kg.

KIT R30 electromechanical motor 230V AC irreversible ideal for sliding gates up to 1200 Kg. with built-in control unit H70, optical encoder and mechanical limit switch.

Complete with a mounting base with tie rods and screws

TECHNICAL IMAGE




PACKAGING INFORMATION



Size in cm: Lenght: 45 - Widht: 21 - Heigth: 31.5



PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

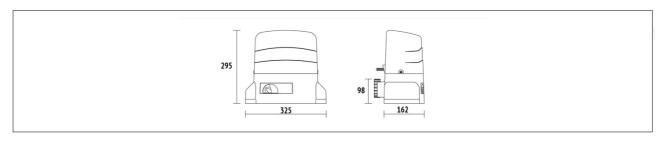

PRODUCT ACCESSORIES



KT212 Raised fixing plate for R30 series.



KT213 Fixing plate and angles bars kit for R30 series.



GA550 Galvanised steel rack 22x22x1000 module 4.



GA551 Galvanised steel rack 30x12x1000 module 4 with spacers and screws.



GA553 Nylon rack module 4 with 6 connectors L.1000.



GA554
Pocket of 6 spacers and screws.